

### BXE T20.1


#### Blox Essentials 20 mm titanium dome tweeter

##### SPECIFICATIONS

Power Handling		W RMS
Impedance	3	Ohm
Sensitivity (2,83V/1m)	88,9	dB
VC diameter	20	mm
VC wire	Copper	
VC former	Kapton	

##### T/S PARAMETER

Fs	1800,0	Hz
Vas		L
Qms	10,36	
Qes	4,42	
Qts	3,10	
Re	3,14	Ohm
Sd	4,5	cm <sup>2</sup>
Mms	0,15	g
Cms	0,05	mm/N
Bl	1,11	Tm
Xmax (+/-)		mm

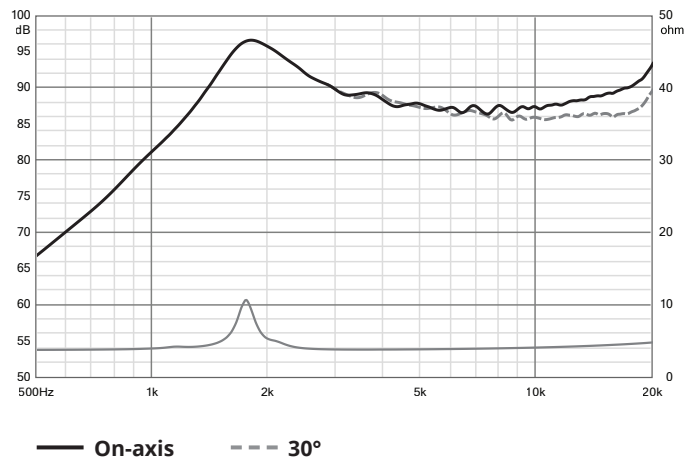

- » 20mm titanium dome for extended frequency response and excellent off-axis linearity
- » Extremely compact for optimal integration
- » Active crossover suggestion: 5 KHz - 18 dB/oct. or 4 KHz - 24 dB/oct Butterworth (Q=0,707)
- » Cable with 2-PIN OEM male and female connector for secure disassembly
- » Snap-fit mounting system allows for perfect integration when combined with the appropriate adapter ring (sold separately)

