

BXS T20RC.1


20 mm Silk Dome tweeter with rear chamber.

SPECIFICATIONS

Power Handling		W RMS
Impedance	4	Ohm
Sensitivity (2,83V/1m)	89,1	dB
VC diameter	20	mm
VC wire	Copper	
VC former	Aluminium	

T/S PARAMETER

Fs	1000,0	Hz
Vas		L
Qms	2,43	
Qes	2,03	
Qts	1,11	
Re	3,20	Ohm
Sd	4,6	cm ²
Mms	0,18	g
Cms	0,14	mm/N
Bl	1,34	Tm
Xmax (+/-)		mm

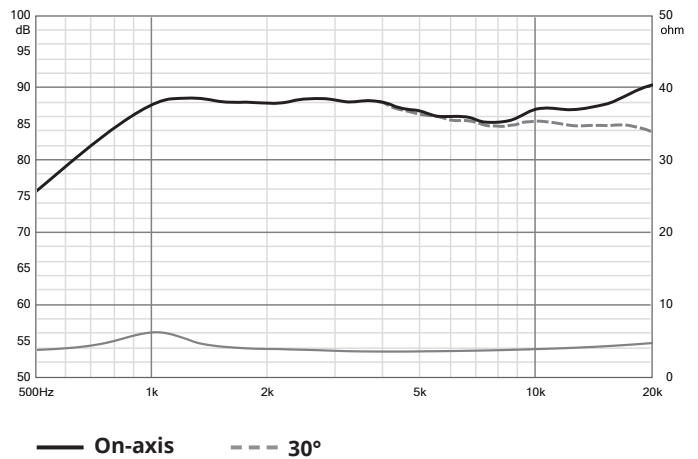

- » 20 mm silk dome with aluminium rear chamber
- » Powerful neodymium motor
- » Rear chamber for low resonance frequency and improved midrange performance

- » Cable with 2-PIN OEM male and female connector for secure disassembly
- » Snap-fit mounting system allows for perfect integration when combined with the appropriate adapter ring (sold separately)

